


ALFRA ROTABEST® – V 32

S-LINE



 **MADE IN GERMANY**

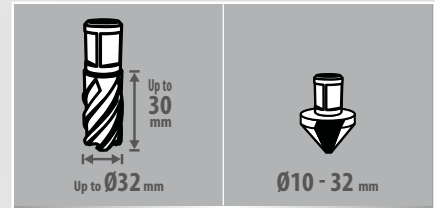

V 32

Core drill dimensions	Ø 12.0 - 32.0 mm
Cutting depth	30.0 mm
Counterboring	Ø 10.0 - 32.0 mm
Arbors	19 mm Weldon shank
1-speed gearbox	450 rpm
Stroke	45 mm
Power consumption	900 W
Voltage	230 V 50/60 Hz 110 V 50/60 Hz
Magnetic adhesion strength	16.000 N
Tool force (10 mm)	2.100 N
Magnetic base	95 x 200 mm
Weight	12.5 kg

Motor

Compact, lying

Compact mitre gear

Slide

2-sided column guide

Operation

Space-saving - through ratchet

Magnet

Metal rings



Performance and weight optimisation



Made in Germany



Scope of delivery

- Metal core drilling machine V 32
- Coolant pressure bottle
- Carrying case
- Allen key for Weldon arbor
- Seat belt
- Ejector pin 6.35 x 74 mm (specially for Rotabest® V32)
- Operating instructions
- **Incl. 1 core drill free**

Prod.-No.

ALFRA Rotabest® V32	230 Volt	18710
ALFRA Rotabest® V32	110 Volt	18710.110